




BlackBerry Radar Cargo Sensor Accessory

Enhanced Visibility to Cargo When You Need It

The BlackBerry Radar Cargo Sensor Accessory is the first wireless sensor released by BlackBerry which communicates with its next generation asset monitoring solution, BlackBerry Radar H2. Designed for operations that need enhanced cargo visibility and control of their shipments, the Cargo Sensor Accessory includes a unique cargo sensing capability that reads cube space utilization, in addition to door open/close alerts and environmental sensors.

- Measure and understand how your trailers and containers are being loaded and utilized
- Optimize fleet operations by knowing when assets are loaded, unloaded and when the status changes
- · Increase cargo capacity utilization with cube space utilization readings
- · Protect the integrity of the cargo

Designed for a ruggedized construction, long battery life and the same provision of reliable data as all BlackBerry Radar products, the cargo sensor seamlessly communicates with BlackBerry Radar H2. Information and analytics are easily viewable in the BlackBerry Radar portal

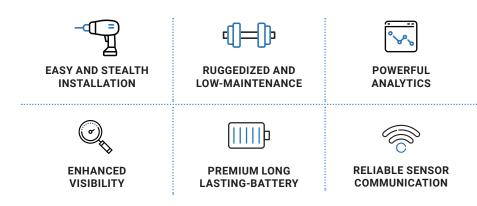

Cargo Visibility with Stealth Installation

The Cargo Sensor Accessory can be installed during the initial implementation of BlackBerry Radar H2 or when the need is identified. The information collected supplements the BlackBerry Radar H2 sensor readings: GPS asset location, accurate mileage, trip reporting and start/stop alerts. The sensor communicates to BlackBerry Radar H2 using a sub-GHz frequency and custom protocol designed for reliability in transportation use cases.

BlackBerry Radar Cargo Sensor Accessory



Enhanced Cargo Visibility into: Containers Trailers

Readings

- Cube Space Utilization
- Door Open/Close
- Temperature
- Humidity
- Pressure





BlackBerry Radar Cargo Sensor Accessory

Enhanced Visibility to Cargo When You Need It

Technical Specifications

Dimensions

167 mm x 94 mm x 42 mm

Sensors and Readings

Time of Flight Sensor: Cube Space Utilization Readings

3-Axis Accelerometer and Gyroscope: Door Open/Close

Environmental Sensor: Temperature, Humidity, Pressure Ambient Light Sensor

Battery

Built-In Long-Lasting Lithium Thionyl Chloride Battery:

- 68 Wh capacity (19 Ah @ 3.6V)
- Up to 6 years of battery life*

Communication

SubGHz short range connectivity 915MHz (in NA) and 868MHz (in EC) with a BlackBerry proprietary protocol

Software, Updates and Security

BlackBerry Secure IoT Platform Client:

- Over-the-Air (OTA) Software Updates
- Secure Boot and Transmission

Environmental

- Operates between -40°C to 85°C (-40 to 185°F)
- Operational Altitude -500 to 15,000 feet

Certifications

MIL STD-810G: Drop, shock, vibration, salt fog, high altitude, solar, UV

SAE J1455: Water spray

IP67, IEC 60529: Dust/water ingress

EN 60950-1:2006: Impact CE, FCC, IC ISO 9001 RoHs REACH WEEE CA prop 65

* Battery life estimates are based on testing during moderate asset usage. Data is collected and sent to BlackBerry Radar H2 when an event is triggered. If the device is unable to send the data when an event, the device will store the information until the next event





© 2019 BlackBerry Limited. Trademarks, including but not limited to BLACKBERRY, BLACKBERRY RADAR and EMBLEM Design are the trademarks or registered trademarks of BlackBerry Limited. All other trademarks are the property of their respective owners. Content: 03/19 | Rev. 14AUGUST2019

www.blackberry.com/radar